



105 Bonnie Drive
Butler, PA 16002
724-283-4681
724-283-5939 (fax)
www.bwieagle.com

PRODUCT INFORMATION BULLETIN

WATER-STIK Dust Suppression System MODEL 67-7000

DESCRIPTION

A safe, inexpensive Dust Suppressor that's truly cost-effective. The WATER-STIK performs every bit as well, if not better than all the "sophisticated" higher-priced units.


Factory assembled and requiring only simple water and electrical hook-ups, the WATER-STIK is the answer to instant compliance and the end of costly citations.

The WATER-STIK sprays only when media is present where dust is liberated (usually just before a transfer point). When the belt is not running, no water is sprayed.

INSTALLATION

1. Suspend the WATER-STIK over the conveyor at a height that gives the desired spray pattern.
2. Make connections to water supply.
3. Connect power cable to 120 VAC. Ground connection required for proper operation and safety.
4. Adjust a conveyor roller to spin only when material is passing over it. If no material is on the belt, the belt should not contact the roller. See VR SENSOR installation section.

DIMENSIONS

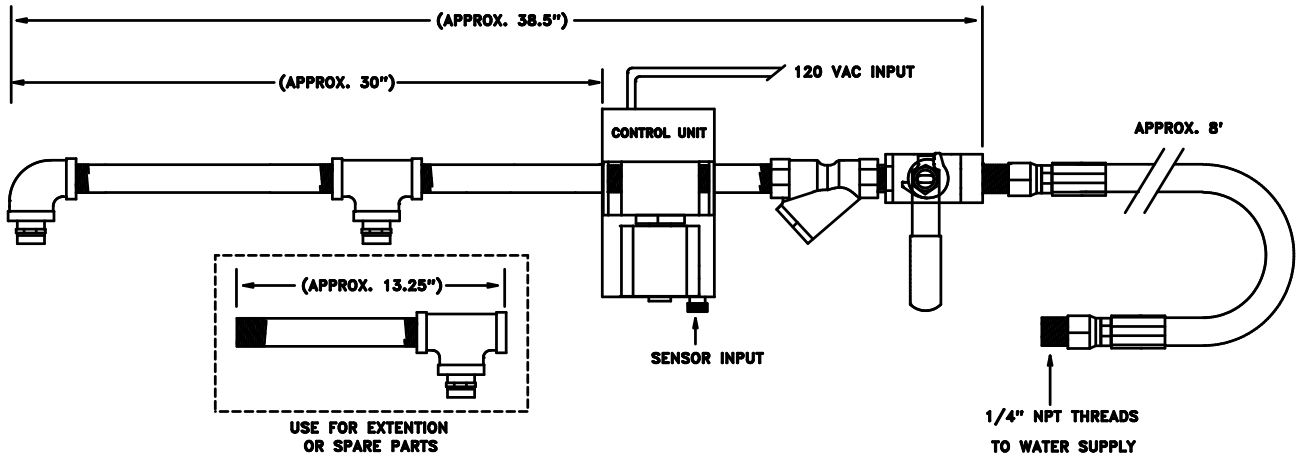

SPECIFICATIONS

AC Input	120 VAC 15 W
Fuse Protected	2 amp
Minimum Operating Speed	100 RPM (use two (2) targets for speeds below 100 RPM)
On-Time Delay	2 Seconds
Maximum Water Pressure	500 P.S.I.
GPM's @ 400 P.S.I.	.8 GPM (1.2 GPM if extension is used)

REPLACEMENT PARTS

Spray Nozzle	99-HDW-0003
High Volume Nozzle	99-HDW-0063
Variable Reluctance Sensor, General Mount	10-7003

